


HITECO POWERTECH 300/400 | HIGH TORQUE

QE-IF 7.5/6 24 63F NC CB



QE-IF 7.5/6 24 63F NC CB

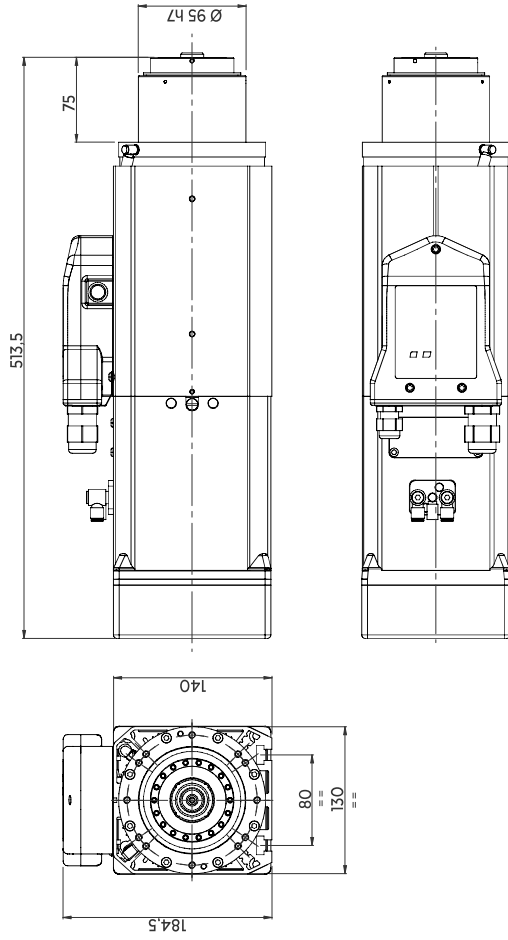

SPECIFICHE TECNICHE TECHNICAL SPECIFICATIONS

S1	7.5	S6	8.5
kW		kW	
S1	11,9	S6	13,5
Nm		Nm	
S1	19,5	S6	21,5
A		A	
Volt	380		
Pol	4		
es			
Sup	inverter		
ply			
rpm	24000		
kg	24		

EQUIPAGGIAMENTO EQUIPMENT

- HSK 63F
- Cuscinetti ceramici
Ceramic ball bearings
- Raffreddamento
con elettroventola
Electrofan cooling

OPZIONALI OPTIONALS

- Encoder
1 Vpp or TTL
- CC circular connector
Male
- CC circular connector
Female (machine side)
- Air tool

PRESTAZIONI PERFORMANCES

